


ADJUSTABLE SHOWER DOORS





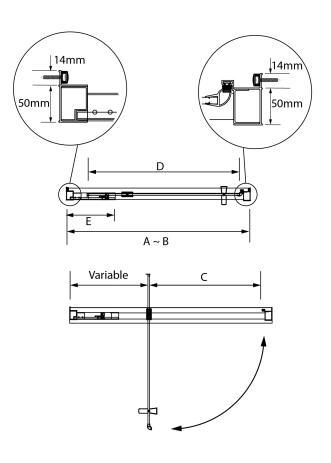

DESCRIPTION

The Symphony Adjustable Shower Door range makes the perfect solution for replacing an old pivot door or shower curtain installed in an alcove cubicle.

The frame features a sliding "trombone" top and bottom rail system which allows the frame to expand and contract to the required width.

The door opening and fixed glass return panel width never changes however the distance from the door pivot block to the adjacent wall varies as the door is expanded.

Our doors are available in either 1830mm or 1950mm overall height.

FEATURES

- AS/NZS 2208 A Grade Safety Glass
- Door panel features a frameless design
- Door can open on the RH or LH side "flip to fit"
- Adjustable "trombone" frame
- Stylish minimalist design
- Polished alloy handle
- Silva finish only
- Available in 1950mm OR 1830mm heights
- Removable bottom drip seal for easy cleaning

Dimension	Description	Door Model					
		NP1	NP2	NP3	NP4	NP5	NP6
А	Minimum frame width overall	715mm	785mm	855mm	925mm	995mm	1135mm
В	Maximum Frame width overall	785mm	855mm	925mm	995mm	1065mm	1205mm
С	Door opening width	436mm	470mm	505mm	540mm	575mm	645mm
	Door panel width	590mm	625mm	660mm	695mm	730mm	800mm
E	Fixed glass return panel and frame width	185mm	320mm	255mm	290mm	325mm	395mm

ORDERING CODES

Description	SKU			
NP1 Silva Adjustable Door 715mm - 785mm 1830mm High	3614427			
NP2 Silva Adjustable Door 785mm - 855mm 1830mm High	3614429			
NP3 Silva Adjustable Door 855mm - 925mm 1830mm High	3614431			
NP4 Silva Adjustable Door 925mm - 995mm 1830mm High	3614433			
NP5 Silva Adjustable Door 995mm - 1065mm 1830mm High	3614435			
NP6 Silva Adjustable Door 1135mm - 1205mm 1830mm High	3614437			
NP1 Silva Adjustable Door 715mm - 785mm 1950mm High	DNP1St195SYMP			
NP2 Silva Adjustable Door 785mm - 855mm 1950mm High	DNP2Si195SYMP			
NP3 Silva Adjustable Door 855mm - 925mm 1950mm High	DNP3Si195SYMP			
NP4 Silva Adjustable Door 925mm - 955mm 1950mm High	DNP4Si195SYMP			
NP5 Silva Adjustable Door 995mm - 1065mm 1950mm High	DNP5Si195SYMP			
NP6 Silva Adjustable Door 1135mm - 1205mm 1950mm High	DNP6Si195SYMP			

WARRANTY INFORMATION

All bathroomware products supplied by Fibre Systems carry our Quality Assurance and Product Warranty. We use the highest quality materials available and manufacture these in accordance with New Zealand specifications and requirements to ensure that all products are fit for the intended purpose for which they are designed. Our customers peace of mind is of paramount importance to us.

Warranty Periods

Showers 10 years
Dezine shower range 5 years
Drop In baths 10 years
Shower Screens and Doors 10 years
Black Coating on Framework 5 years
Freestanding Baths 5 years
Accessories 2 years



Warranty Exclusions

The product must be installed according to the instructions supplied.

The water supply temperature applied to the product must not exceed 55 degrees Celsius.

Commercial applications (where products are installed in a building where occupancy is via a commercial arrangement i.e. rental property, hotel, hostel etc.) are restricted to a 2 year warranty on all products.

CLEANING AND MAINTENANCE

Bathroom products are used often and the following is our suggestion on how to clean and care for them.

Shower Wall

We use Durosan premium quality sanitaryware grade Acrylic. It is, by design, very robust and chemical resistant. A soft damp cloth with non-abrasive cleaners should be used. Use only non-abrasive cleaners that are recommended for acrylic products.

Shower Tray and Bath

We manufacture our Shower Trays and Baths using a Solid Acrylic Surface. Most other shower trays are manufactured using a veneer acrylic surface. The great advantage is that small scratches can be removed easily by using fine cutting compound. Again, the same basic cleaning methods as the wall are recommended.

Shower Doors and Glass

All glass is compliant to AS/NZS 2208. We suggest that the glass surfaces are wiped down or squeegeed following use to remove excess water. For best results use a trusted glass cleaner.

Metal Framework

Should be cleaned using a soft damp cloth with non-abrasive cleaner. Note that on round showers, the bottom rollers are easy release for ease of cleaning. If chemical spray cleaners are used, avoid direct contact with the rollers and guides and ensure the shower is rinsed off to avoid residue build up.

Weather Seals and Drip Strips

Can be removed if required for cleaning, and can be replaced when they no longer look their best. Refer to the spare parts and accessories section of our website for more details.

Note - If the Glass has been treated follow specific cleaning instructions from the system provider.

